




## ASSEMBLY INSTRUCTIONS

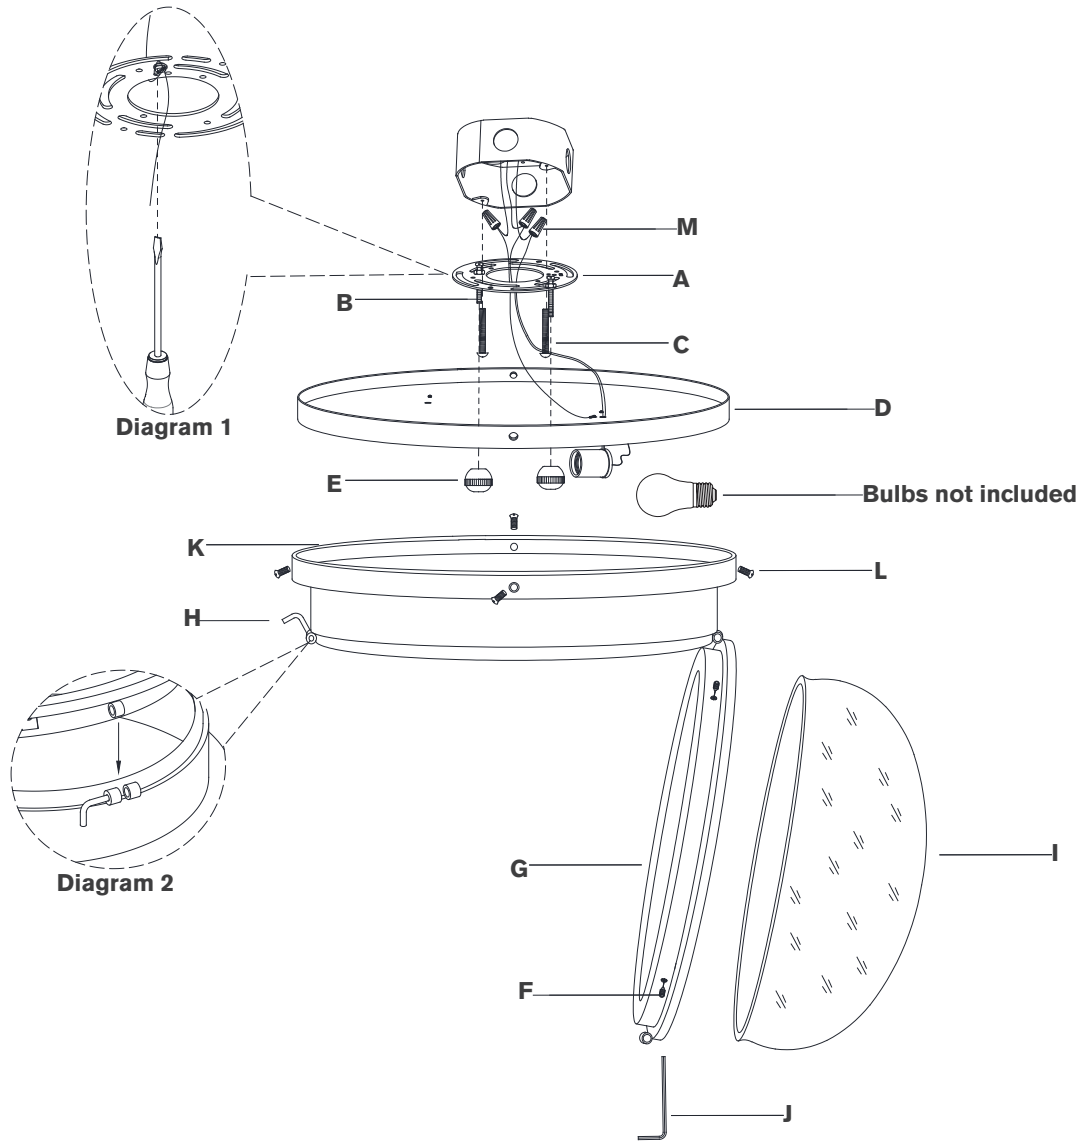

## Marine Medium Flush Mount

Item # SL 4001

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Install light bulbs into the sockets.
11. Open glass ring (**G**) by removing latch (**H**) (see diagram 2).
12. Remove set screws (**F**) from glass ring (**G**) using provided allen wrench (**J**), then install glass shade (**I**) to glass ring (**G**) and secure with set screws (**F**) using provided allen wrench (**J**).  
**NOTE:** Do not over-tighten otherwise glass could become damaged.
13. Close glass ring (**G**) by securing latch (**H**).
14. Install metal shade (**K**) to fixture body (**D**) and secure with screws (**L**).

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.