



## Features

- 3000K color temperature and 90+ CRI
- Edge-lit design and diffuse lens eliminate dotting and evenly distributes light
- 24V DC fixtures link up to 96 watts
- Low profile design - less than 3/8" high
- Dimmable with most CL and ELV dimmers
- cETLus Listed for dry locations

## Available Lengths

8" / 16" / 22" / 34"

## Available Finish



White

## Control Options

- Trulux Single Color Controls  
Requires Adaptive Driver + Trulux Receiver
- Primary Side Dimming  
Requires Standard Dimmer + Adaptive Driver

## Listing / Ratings




Intertek

## EdgeLink Flat Panel - 24V

Super low-profile, 90+ CRI LED flat panel fixtures are available in four sizes with Warm White 3000K LED light. Link multiple panels with extension cables (jumpers) or connect directly with included inline connector to accommodate virtually any application. Dimmable with Trulux single color RF control systems and most CL and ELV dimmers.

## Technical Information

Series	EDGE-WW
Input Voltage	24V DC
CCT	3000K
CRI	90+
Wattage	7W / 13W / 19W / 24W
Lumens	340Lm / 675Lm / 1000Lm / 1200Lm
Beam Angle	120°
Max Run	Dependent on driver (linkable up to 96W max)
Dimmable	15-100% (CL, ELV, TRIAC); 5-100% (Trulux)
Mounting	Surface mount
Rating	cETLus Listed (dry locations)
Rated Life	35,000 hrs

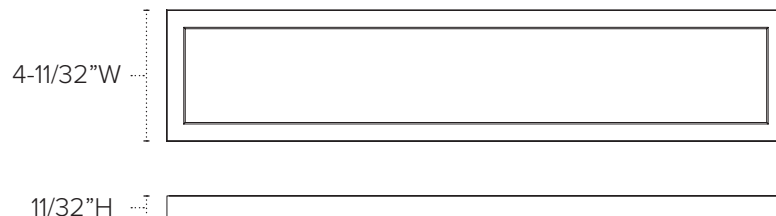

## EdgeLink Flat Panel



EdgeLink LED Flat Panel  
3000K Warm White

**EDGE-WW-8-WH** (8" / 7W / up to 340Lm)

**EDGE-WW-16-WH** (16" / 13W / up to 675Lm)

**EDGE-WW-22-WH** (22" / 19W / up to 1000Lm)

**EDGE-WW-34-WH** (34" / 24W / up to 1200Lm)

EdgeLink fixtures include: (1) 6' 20AWG Connector Wire with mounting tack nails / (1) End-to-end linking connector  
(1) Magnetic mounting plate with mounting screws

## EdgeLink Accessories



Adaptive 24V Drivers

- ADPT-DRJ-30-24** (30W)
- ADPT-DRJ-60-24** (60W)
- ADPT-DRJ-96-24** (96W)
- ADPT-DRJ-192-24** (192W)
- ADPT-DRJ-288-24** (288W)



12' 20AWG Power Connector Wire


**EDGE-CONKIT12** (12' / White)



Interconnectable Linking Cables

- EDGE-EX6-WH** (6" / White)
- EDGE-EX12-WH** (12" / White)
- EDGE-EX24-WH** (24" / White)

## Trulux Controller Set-up




Push Dial Controller  
(Single zone)



Adaptive LED Driver  
(30W / 60W / 96W / 192W / 288W)




Trulux RF Receiver  
(Required)



EdgeLink Flat Panel


## Primary Side Dimming Set-up



CL/ELV Dimmer



ADPT-DRJ Driver  
(30W, 60W, 96W)



EdgeLink Flat Panel